TOSHIBA

ARCHIVE - VRF - CONCEALED CHASSIS PRODUCT SPECIFICATION

Contents	Model Reference	Pages
Concealed Chassis	MML - UP***1BH-E	3 - 8
Brochures		9
Brochures		9
Contact Us		10
Contact Us		10

TOSHIBA

PRODUCT SPECIFICATION

VRF CONCEALED CHASSIS: MML - UP0071BH-E

- Ideal for office and other commercial buildings.
- Fits perfectly for specialist applications such as a library or hospital building.
- Removable split front panel with immediate access to the main components.
- Compact design, which can be installed under a window sill, that is only 600mm in height.
- Depth of only 220mm, the unit can be installed along the wall ensuring maximum space saving.

Hi - Res Image

Performance Data			
Capacity Code		HP	0.8
Nominal	Cooling Capacity	kW	2.2
	Heating Capacity	kW	2.5
UK	Cooling Total/Sensible	kW	2.0/1.3
	Heating	kW	1.7
Electrical	Power Input	kW	0.058
	Run Current	Amps	0.27
	Start Current	Amps	0.60

Indoor Data			
Airflow	High - Medium - Low	l/s	128 - 111 - 83
	High - Medium - Low	m3/h	460 - 400 - 300
External Static Pressure	Standard	Pa	5
Sound	Pressure High - Medium - Low	dB(A)	36 - 34 - 32
	Power High - Medium - Low	dB(A)	51 - 49 - 47
Unit	Height x Width x Depth	mm	600 x 745 x 220
	Weight	kg	21
Pipe Connection	Flare Connections (gas - liquid)	inch	3/8 - 1/4
	Drain Pipe Connection ID	mm	20
Power Supply	Suggested Fuse Size	V/ph/Hz-A	220-240/1/50-5

Accessories	
RBC-ASCU32Y-E	Compact Controller - Local Compact Controller , LCD Display
RBC-AMTU31-E	Standard Controller - Standard remote controller can control an individual indoor unit or a group of 8 indoor units.
RBC-AMSU52-E	Standard Controller - Includes timer and back light display as well as power-save functions, multilingual
RBC-AWSU52-E	Premium Remote Controller - Includes timer and back light display as well as power-save functions, multilingual (inc. Bluetooth)

Compatible R410a outdoor condensers:
Mini SMMS-e, SMMS-u

Compatible R32 outdoor condensers:
Mini SMMS

Related items:

- Full specification
- BIM files
- Dimensional drawing
- Wiring diagram
- Noise curve data
- Installation manual

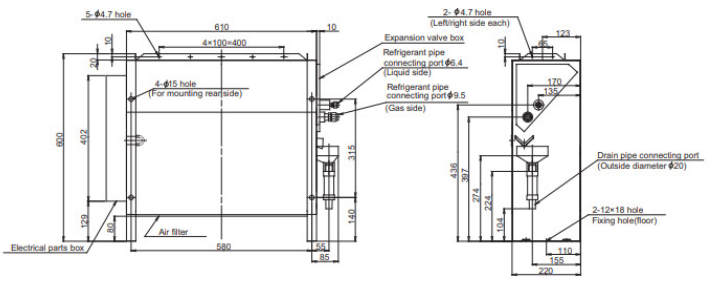

TOSHIBA

PRODUCT SPECIFICATION

VRF CONCEALED CHASSIS: MML - UP0091BH-E

- Ideal for office and other commercial buildings.
- Fits perfectly for specialist applications such as a library or hospital building.
- Removable split front panel with immediate access to the main components.
- Compact design, which can be installed under a window sill, that is only 600mm in height.
- Depth of only 220mm, the unit can be installed along the wall ensuring maximum space saving.

Hi - Res Image

Performance Data			
Capacity Code		HP	1.0
Nominal	Cooling Capacity	kW	2.8
	Heating Capacity	kW	3.2
UK	Cooling Total/Sensible	kW	2.5/1.5
	Heating	kW	2.2
Electrical	Power Input	kW	0.058
	Run Current	Amps	0.27
	Start Current	Amps	0.60

Indoor Data			
Airflow	High - Medium - Low	l/s	128 - 111 - 83
	High - Medium - Low	m3/h	460 - 400 - 300
External Static Pressure	Standard	Pa	5
Sound	Pressure High - Medium - Low	dB(A)	36 - 34 - 32
	Power High - Medium - Low	dB(A)	51 - 49 - 47
Unit	Height x Width x Depth	mm	600 x 745 x 220
	Weight	kg	21
Pipe Connection	Flare Connections (gas - liquid)	inch	3/8 - 1/4
	Drain Pipe Connection ID	mm	20
Power Supply	Suggested Fuse Size	V/ph/Hz-A	220-240/1/50-5

Accessories	
RBC-ASCU32Y-E	Compact Controller - Local Compact Controller , LCD Display
RBC-AMTU31-E	Standard Controller - Standard remote controller can control an individual indoor unit or a group of 8 indoor units.
RBC-AMSU52-E	Standard Controller - Includes timer and back light display as well as power-save functions, multilingual
RBC-AWSU52-E	Premium Remote Controller - Includes timer and back light display as well as power-save functions, multilingual (inc. Bluetooth)

Compatible R410a outdoor condensers:
Mini SMMS-e, SMMS-u

Compatible R32 outdoor condensers:
Mini SMMS

Related items:
- Full specification
- BIM files
- Dimensional drawing
- Wiring diagram
- Noise curve data
- Installation manual

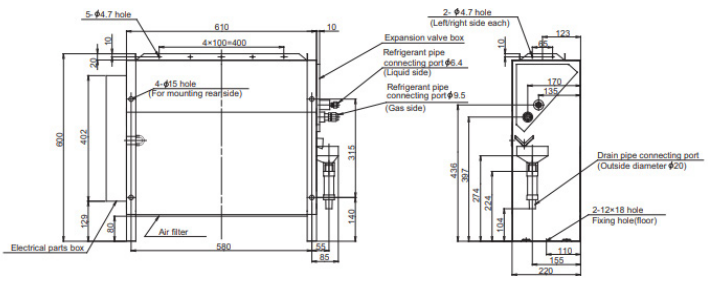

TOSHIBA

PRODUCT SPECIFICATION

VRF CONCEALED CHASSIS: MML - UP0121BH-E

- Ideal for office and other commercial buildings.
- Fits perfectly for specialist applications such as a library or hospital building.
- Removable split front panel with immediate access to the main components.
- Compact design, which can be installed under a window sill, that is only 600mm in height.
- Depth of only 220mm, the unit can be installed along the wall ensuring maximum space saving.

Hi - Res Image

Performance Data			
Capacity Code		HP	1.3
Nominal	Cooling Capacity	kW	3.6
	Heating Capacity	kW	4.0
UK	Cooling Total/Sensible	kW	3.3/2.1
	Heating	kW	2.7
Electrical	Power Input	kW	0.058
	Run Current	Amps	0.27
	Start Current	Amps	0.60

Indoor Data			
Airflow	High - Medium - Low	l/s	128 - 111 - 83
	High - Medium - Low	m3/h	460 - 400 - 300
External Static Pressure	Standard	Pa	5
Sound	Pressure High - Medium - Low	dB(A)	36 - 34 - 32
	Power High - Medium - Low	dB(A)	51 - 49 - 47
Unit	Height x Width x Depth	mm	600 x 745 x 220
	Weight	kg	21
Pipe Connection	Flare Connections (gas - liquid)	inch	3/8 - 1/4
	Drain Pipe Connection ID	mm	20
Power Supply	Suggested Fuse Size	V/ph/Hz-A	220-240/1/50-5

Accessories	
RBC-ASCU32Y-E	Compact Controller - Local Compact Controller , LCD Display
RBC-AMTU31-E	Standard Controller - Standard remote controller can control an individual indoor unit or a group of 8 indoor units.
RBC-AMSU52-E	Standard Controller - Includes timer and back light display as well as power-save functions, multilingual
RBC-AWSU52-E	Premium Remote Controller - Includes timer and back light display as well as power-save functions, multilingual (inc. Bluetooth)

Compatible R410a outdoor condensers:
Mini SMMS-e, SMMS-u

Compatible R32 outdoor condensers:
Mini SMMS

Related items:
- Full specification
- BIM files
- Dimensional drawing
- Wiring diagram
- Noise curve data
- Installation manual

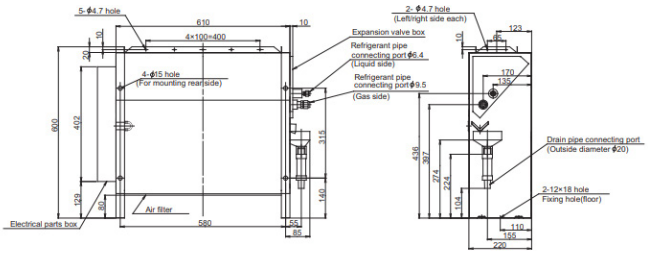

VRF CONCEALED CHASSIS: MML - UP0151BH-E

- Ideal for office and other commercial buildings.
- Fits perfectly for specialist applications such as a library or hospital building.
- Removable split front panel with immediate access to the main components.
- Compact design, which can be installed under a window sill, that is only 600mm in height.
- Depth of only 220mm, the unit can be installed along the wall ensuring maximum space saving.

Hi - Res Image

Performance Data			
Capacity Code		HP	1.7
Nominal	Cooling Capacity	kW	4.5
	Heating Capacity	kW	5.0
UK	Cooling Total/Sensible	kW	4.1/2.7
	Heating	kW	3.4
Electrical	Power Input	kW	0.096
	Run Current	Amps	0.46
	Start Current	Amps	0.80

Indoor Data			
Airflow	High - Medium - Low	l/s	206 - 167 - 136
	High - Medium - Low	m3/h	740 - 600 - 490
External Static Pressure	Standard	Pa	5
Sound	Pressure High - Medium - Low	dB(A)	36 - 34 - 32
	Power High - Medium - Low	dB(A)	51 - 49 - 47
Unit	Height x Width x Depth	mm	600 x 1045 x 220
	Weight	kg	28
Pipe Connection	Flare Connections (gas - liquid)	inch	1/2 - 1/4
	Drain Pipe Connection ID	mm	20
Power Supply	Suggested Fuse Size	V/ph/Hz-A	220-240/1/50-5

Accessories	
RBC-ASCU32Y-E	Compact Controller - Local Compact Controller , LCD Display
RBC-AMTU31-E	Standard Controller - Standard remote controller can control an individual indoor unit or a group of 8 indoor units.
RBC-AMSU52-E	Standard Controller - Includes timer and back light display as well as power-save functions, multilingual
RBC-AWSU52-E	Premium Remote Controller - Includes timer and back light display as well as power-save functions, multilingual (inc. Bluetooth)

Compatible R410a outdoor condensers:
Mini SMMS-e, SMMS-u

Compatible R32 outdoor condensers:
Mini SMMS

Related items:
- Full specification
- BIM files
- Dimensional drawing
- Wiring diagram
- Noise curve data
- Installation manual

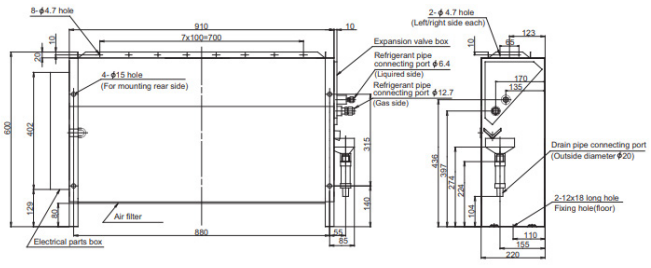

TOSHIBA

PRODUCT SPECIFICATION

VRF CONCEALED CHASSIS: MML - UP0181BH-E

- Ideal for office and other commercial buildings.
- Fits perfectly for specialist applications such as a library or hospital building.
- Removable split front panel with immediate access to the main components.
- Compact design, which can be installed under a window sill, that is only 600mm in height.
- Depth of only 220mm, the unit can be installed along the wall ensuring maximum space saving.

Hi - Res Image

Performance Data			
Capacity Code		HP	2.0
Nominal	Cooling Capacity	kW	5.6
	Heating Capacity	kW	6.3
UK	Cooling Total/Sensible	kW	5.1/3.3
	Heating	kW	4.3
Electrical	Power Input	kW	0.096
	Run Current	Amps	0.46
	Start Current	Amps	0.80

Indoor Data			
Airflow	High - Medium - Low	l/s	206 - 167 - 136
	High - Medium - Low	m3/h	740 - 600 - 490
External Static Pressure	Standard	Pa	5
Sound	Pressure High - Medium - Low	dB(A)	36 - 34 - 32
	Power High - Medium - Low	dB(A)	51 - 49 - 47
Unit	Height x Width x Depth	mm	600 x 1045 x 220
	Weight	kg	28
Pipe Connection	Flare Connections (gas - liquid)	inch	1/2 - 1/4
	Drain Pipe Connection ID	mm	20
Power Supply	Suggested Fuse Size	V/ph/Hz-A	220-240/1/50-5

Accessories	
RBC-ASCU32Y-E	Compact Controller - Local Compact Controller , LCD Display
RBC-AMTU31-E	Standard Controller - Standard remote controller can control an individual indoor unit or a group of 8 indoor units.
RBC-AMSU52-E	Standard Controller - Includes timer and back light display as well as power-save functions, multilingual
RBC-AWSU52-E	Premium Remote Controller - Includes timer and back light display as well as power-save functions, multilingual (inc. Bluetooth)

Compatible R410a outdoor condensers:
Mini SMMS-e, SMMS-u

Compatible R32 outdoor condensers:
Mini SMMS

Related items:

- Full specification
- BIM files
- Dimensional drawing
- Wiring diagram
- Noise curve data
- Installation manual

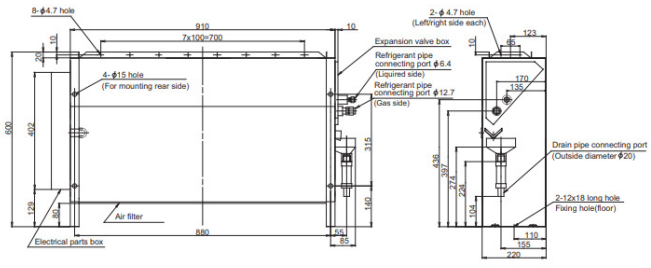

TOSHIBA

PRODUCT SPECIFICATION

VRF CONCEALED CHASSIS: MML - UP0241BH-E

- Ideal for office and other commercial buildings.
- Fits perfectly for specialist applications such as a library or hospital building.
- Removable split front panel with immediate access to the main components.
- Compact design, which can be installed under a window sill, that is only 600mm in height.
- Depth of only 220mm, the unit can be installed along the wall ensuring maximum space saving.

Hi - Res Image

Performance Data			
Capacity Code		HP	2.5
Nominal	Cooling Capacity	kW	7.1
	Heating Capacity	kW	8.0
UK	Cooling Total/Sensible	kW	6.4/4.2
	Heating	kW	5.4
Electrical	Power Input	kW	0.110
	Run Current	Amps	0.51
	Start Current	Amps	1.00

Indoor Data			
Airflow	High - Medium - Low	l/s	264 - 219 - 178
	High - Medium - Low	m3/h	950 - 790 - 640
External Static Pressure	Standard	Pa	5
Sound	Pressure High - Medium - Low	dB(A)	42 - 37 - 33
	Power High - Medium - Low	dB(A)	57 - 52 - 48
Unit	Height x Width x Depth	mm	600 x 1045 x 220
	Weight	kg	28
Pipe Connection	Flare Connections (gas - liquid)	inch	5/8 - 3/8
	Drain Pipe Connection ID	mm	20
Power Supply	Suggested Fuse Size	V/ph/Hz-A	220-240/1/50-5

Accessories	
RBC-ASCU32Y-E	Compact Controller - Local Compact Controller , LCD Display
RBC-AMTU31-E	Standard Controller - Standard remote controller can control an individual indoor unit or a group of 8 indoor units.
RBC-AMSU52-E	Standard Controller - Includes timer and back light display as well as power-save functions, multilingual
RBC-AWSU52-E	Premium Remote Controller - Includes timer and back light display as well as power-save functions, multilingual (inc. Bluetooth)

Compatible R410a outdoor condensers:
Mini SMMS-e, SMMS-u

Compatible R32 outdoor condensers:
Mini SMMS

Related items:
- Full specification
- BIM files
- Dimensional drawing
- Wiring diagram
- Noise curve data
- Installation manual

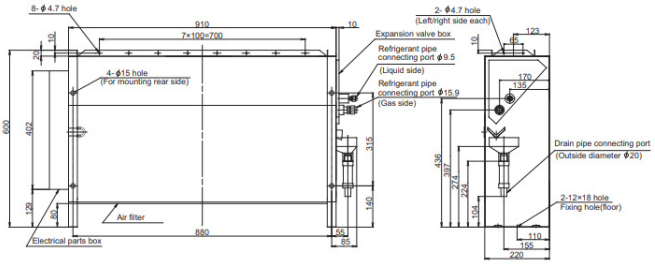

DOWNLOAD BROCHURES

TOSHIBA

OFFICE LOCATIONS

Manchester
Carrier Solutions UK Ltd
Unit 15 S:Park Business Park
Hamilton Road
Stockport
Greater Manchester
SK1 2AE
Tel: 0330 236 8630 - **opt 2**
marketing.uk@toshiba-ac.com

St Albans
Carrier Solutions UK Ltd
Unit 7, Riverside Industrial Estate
Borderlake House
London Colney
St Albans
AL 2 1HG
Tel: 0330 236 8630 - **opt 4**
marketing.uk@toshiba-ac.com

Telford
Viessmann UK
Hortonwood 30
Hortonwood Roundabout
Telford
Shropshire
TF1 7YP
Tel: 0330 236 8630 - **opt 5**
marketing.uk@toshiba-ac.com

Plymouth
Carrier Solutions UK Ltd
Porsham Close
Belliver Industrial Estate
Plymouth
Devon
PL6 7DB
Tel: 0330 236 8630 - **opt 2**
marketing.uk@toshiba-ac.com

DEPARTMENTAL CONTACT DETAILS

Sales Order Processing
0330 236 8630 opt 2 - **opt 1**
sales.support@toshiba-ac.com

Pre Sales Team
0330 236 8630 opt 2 - **opt 2**
projects.uk@toshiba-ac.com

Spare Parts
0330 236 8630 opt 2 - **opt 3**
spares@toshiba-ac.com

Warranty
0330 236 8630 opt 2 - **opt 4**
warranty@toshiba-ac.com

Technical Support
0330 236 8630 opt 2 - **opt 5**
technical.enquiries@toshiba-ac.com

Training
0330 236 8630 opt 2 - **opt 6**
toshiba.training@toshiba-ac.com

www.toshiba-aircon.co.uk

A Carrier Company

© 2026 Carrier. All Rights Reserved.