TOSHIBA

ARCHIVE - VRF - FLOOR MOUNTED CONSOLE PRODUCT SPECIFICATION

Contents	Model Reference	Pages
Floor Mounted Console	MML - UP***1H-E	3 - 8
Brochures		9
Brochures		9
Contact Us		10
Contact Us		10

VRF FLOOR MOUNTED CONSOLE: MML - UP0071H-E

- One single cabinet size, for all capacity models.
- Minimum space required for installation and servicing.
- Refrigerant and drain piping with four installation possibilities.
- Has the ability to have Air flow in horizontal and vertical direction.
- Perfect choice, for refurbishment projects, where the available space is limited.

Hi - Res Image

Performance Data			
Capacity Code		HP	0.8
Nominal	Cooling Capacity	kW	2.2
	Heating Capacity	kW	2.5
UK	Cooling Total/Sensible	kW	2.0/1.3
	Heating	kW	1.7
Electrical	Power Input	kW	0.056
	Run Current	Amps	0.26
	Start Current	Amps	0.60

Indoor Data			
Airflow	High - Medium - Low	l/s	133 - 117 - 100
	High - Medium - Low	m3/h	480 - 420 - 360
Sound	Pressure High - Medium - Low	dB(A)	39 - 37 - 35
	Power High - Medium - Low	dB(A)	54 - 52 - 50
Unit	Height x Width x Depth	mm	630 x 950 x 230
	Weight	kg	37
Pipe Connection	Flare Connections (gas - liquid)	inch	3/8 - 1/4
	Drain Pipe Connection OD/ID	mm	26/20
Power Supply	Suggested Fuse Size	V/ph/Hz-A	220-240/1/50-5

Accessories	
RBC-ASCU32Y-E	Compact Controller - Local Compact Controller , LCD Display
RBC-AMTU31-E	Standard Controller - Standard remote controller can control an individual indoor unit or a group of 8 indoor units.
RBC-AMSU52-E	Standard Controller - Includes timer and back light display as well as power-save functions, multilingual
RBC-AWSU52-E	Premium Remote Controller - Includes timer and back light display as well as power-save functions, multilingual (inc. Bluetooth)

Compatible R410a outdoor condensers:
Mini SMMS-e, SMMS-u

Compatible R32 outdoor condensers:
Mini SMMS

Related items:

- Full specification
- BIM files
- CAD files
- Airflow/ fan curve
- Dimensional drawing
- Wiring diagram
- Noise curve data
- Installation manual

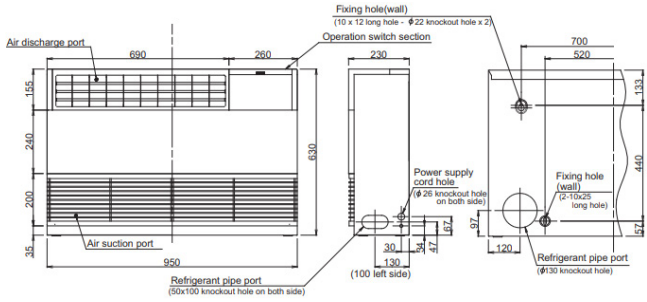

TOSHIBA

PRODUCT SPECIFICATION

VRF FLOOR MOUNTED CONSOLE: MML - UP0091H-E

- One single cabinet size, for all capacity models.
- Minimum space required for installation and servicing.
- Refrigerant and drain piping with four installation possibilities.
- Has the ability to have Air flow in horizontal and vertical direction.
- Perfect choice, for refurbishment projects, where the available space is limited.

Hi - Res Image

Performance Data			
Capacity Code		HP	1.0
Nominal	Cooling Capacity	kW	2.8
	Heating Capacity	kW	3.2
UK	Cooling Total/Sensible	kW	2.5/1.5
	Heating	kW	2.2
Electrical	Power Input	kW	0.056
	Run Current	Amps	0.26
	Start Current	Amps	0.60

Indoor Data			
Airflow	High - Medium - Low	l/s	133 - 117 - 100
	High - Medium - Low	m3/h	480 - 420 - 360
Sound	Pressure High - Medium - Low	dB(A)	39 - 37 - 35
	Power High - Medium - Low	dB(A)	54 - 52 - 50
Unit	Height x Width x Depth	mm	630 x 950 x 230
	Weight	kg	37
Pipe Connection	Flare Connections (gas - liquid)	inch	3/8 - 1/4
	Drain Pipe Connection OD/ID	mm	26/20
Power Supply	Suggested Fuse Size	V/ph/Hz-A	220-240/1/50-5

Accessories	
RBC-ASCU32Y-E	Compact Controller - Local Compact Controller , LCD Display
RBC-AMTU31-E	Standard Controller - Standard remote controller can control an individual indoor unit or a group of 8 indoor units.
RBC-AMSU52-E	Standard Controller - Includes timer and back light display as well as power-save functions, multilingual
RBC-AWSU52-E	Premium Remote Controller - Includes timer and back light display as well as power-save functions, multilingual (inc. Bluetooth)

Compatible R410a outdoor condensers:
Mini SMMS-e, SMMS-u

Compatible R32 outdoor condensers:
Mini SMMS

Related items:

- Full specification
- BIM files
- CAD files
- Airflow/ fan curve
- Dimensional drawing
- Wiring diagram
- Noise curve data
- Installation manual

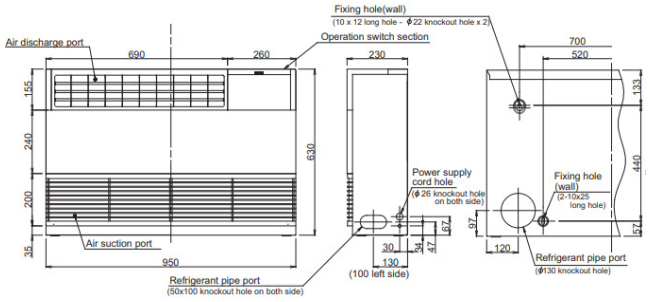

VRF FLOOR MOUNTED CONSOLE: MML - UP0121H-E

- One single cabinet size, for all capacity models.
- Minimum space required for installation and servicing.
- Refrigerant and drain piping with four installation possibilities.
- Has the ability to have Air flow in horizontal and vertical direction.
- Perfect choice, for refurbishment projects, where the available space is limited.

Hi - Res Image

Performance Data			
Capacity Code		HP	1.3
Nominal	Cooling Capacity	kW	3.6
	Heating Capacity	kW	4.0
UK	Cooling Total/Sensible	kW	3.3/2.1
	Heating	kW	2.7
Electrical	Power Input	kW	0.092
	Run Current	Amps	0.43
	Start Current	Amps	0.80

Indoor Data			
Airflow	High - Medium - Low	l/s	250 - 217 - 180
	High - Medium - Low	m3/h	900 - 780 - 650
Sound	Pressure High - Medium - Low	dB(A)	45 - 41 - 38
	Power High - Medium - Low	dB(A)	60 - 56 - 53
Unit	Height x Width x Depth	mm	630 x 950 x 230
	Weight	kg	37
Pipe Connection	Flare Connections (gas - liquid)	inch	3/8 - 1/4
	Drain Pipe Connection OD/ID	mm	26/20
Power Supply	Suggested Fuse Size	V/ph/Hz-A	220-240/1/50-5

Accessories	
RBC-ASCU32Y-E	Compact Controller - Local Compact Controller , LCD Display
RBC-AMTU31-E	Standard Controller - Standard remote controller can control an individual indoor unit or a group of 8 indoor units.
RBC-AMSU52-E	Standard Controller - Includes timer and back light display as well as power-save functions, multilingual
RBC-AWSU52-E	Premium Remote Controller - Includes timer and back light display as well as power-save functions, multilingual (inc. Bluetooth)

Compatible R410a outdoor condensers:
Mini SMMS-e, SMMS-u

Compatible R32 outdoor condensers:
Mini SMMS

Related items:
- Full specification
- BIM files
- CAD files
- Airflow/ fan curve
- Dimensional drawing
- Wiring diagram
- Noise curve data
- Installation manual

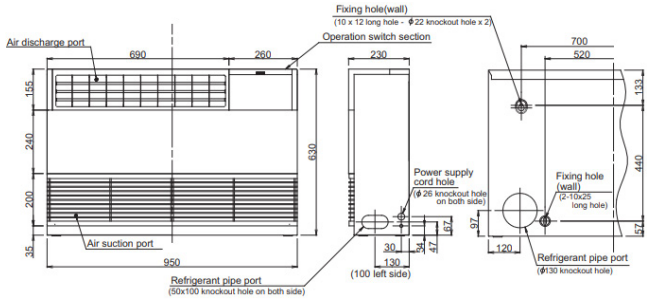

VRF FLOOR MOUNTED CONSOLE: MML - UP0151H-E

- One single cabinet size, for all capacity models.
- Minimum space required for installation and servicing.
- Refrigerant and drain piping with four installation possibilities.
- Has the ability to have Air flow in horizontal and vertical direction.
- Perfect choice, for refurbishment projects, where the available space is limited.

Hi - Res Image

Performance Data			
Capacity Code		HP	1.7
Nominal	Cooling Capacity	kW	4.5
	Heating Capacity	kW	5.0
UK	Cooling Total/Sensible	kW	3.8/2.5
	Heating	kW	3.4
Electrical	Power Input	kW	0.092
	Run Current	Amps	0.43
	Start Current	Amps	0.80

Indoor Data			
Airflow	High - Medium - Low	l/s	250 - 217 - 180
	High - Medium - Low	m3/h	900 - 780 - 650
Sound	Pressure High - Medium - Low	dB(A)	45 - 41 - 38
	Power High - Medium - Low	dB(A)	60 - 56 - 53
Unit	Height x Width x Depth	mm	630 x 950 x 230
	Weight	kg	37
Pipe Connection	Flare Connections (gas - liquid)	inch	1/2 - 1/4
	Drain Pipe Connection OD/ID	mm	26/20
Power Supply	Suggested Fuse Size	V/ph/Hz-A	220-240/1/50-5

Accessories	
RBC-ASCU32Y-E	Compact Controller - Local Compact Controller , LCD Display
RBC-AMTU31-E	Standard Controller - Standard remote controller can control an individual indoor unit or a group of 8 indoor units.
RBC-AMSU52-E	Standard Controller - Includes timer and back light display as well as power-save functions, multilingual
RBC-AWSU52-E	Premium Remote Controller - Includes timer and back light display as well as power-save functions, multilingual (inc. Bluetooth)

Compatible R410a outdoor condensers:
Mini SMMS-e, SMMS-u

Compatible R32 outdoor condensers:
Mini SMMS

Related items:

- Full specification
- BIM files
- CAD files
- Airflow/ fan curve
- Dimensional drawing
- Wiring diagram
- Noise curve data
- Installation manual

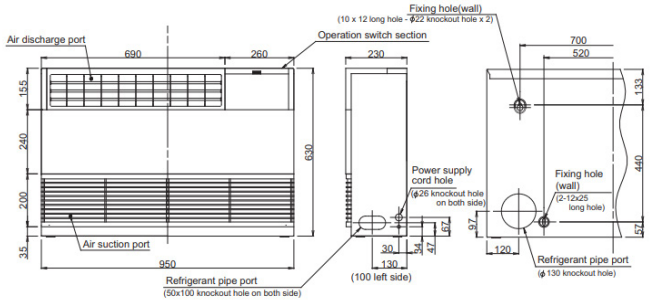

VRF FLOOR MOUNTED CONSOLE: MML - UP0181H-E

- One single cabinet size, for all capacity models.
- Minimum space required for installation and servicing.
- Refrigerant and drain piping with four installation possibilities.
- Has the ability to have Air flow in horizontal and vertical direction.
- Perfect choice, for refurbishment projects, where the available space is limited.

Hi - Res Image

Performance Data			
Capacity Code		HP	2.0
Nominal	Cooling Capacity	kW	5.6
	Heating Capacity	kW	6.3
UK	Cooling Total/Sensible	kW	5.1/3.3
	Heating	kW	4.3
Electrical	Power Input	kW	0.102
	Run Current	Amps	0.47
	Start Current	Amps	1.10

Indoor Data			
Airflow	High - Medium - Low	l/s	300 - 267 - 217
	High - Medium - Low	m3/h	1080 - 930 - 780
Sound	Pressure High - Medium - Low	dB(A)	49 - 44 - 39
	Power High - Medium - Low	dB(A)	64 - 59 - 54
Unit	Height x Width x Depth	mm	630 x 950 x 230
	Weight	kg	40
Pipe Connection	Flare Connections (gas - liquid)	inch	1/2 - 1/4
	Drain Pipe Connection OD/ID	mm	26/20
Power Supply	Suggested Fuse Size	V/ph/Hz-A	220-240/1/50-5

Accessories	
RBC-ASCU32Y-E	Compact Controller - Local Compact Controller , LCD Display
RBC-AMTU31-E	Standard Controller - Standard remote controller can control an individual indoor unit or a group of 8 indoor units.
RBC-AMSU52-E	Standard Controller - Includes timer and back light display as well as power-save functions, multilingual
RBC-AWSU52-E	Premium Remote Controller - Includes timer and back light display as well as power-save functions, multilingual (inc. Bluetooth)

Compatible R410a outdoor condensers:
Mini SMMS-e, SMMS-u

Compatible R32 outdoor condensers:
Mini SMMS

Related items:
- Full specification
- BIM files
- CAD files
- Airflow/ fan curve
- Dimensional drawing
- Wiring diagram
- Noise curve data
- Installation manual

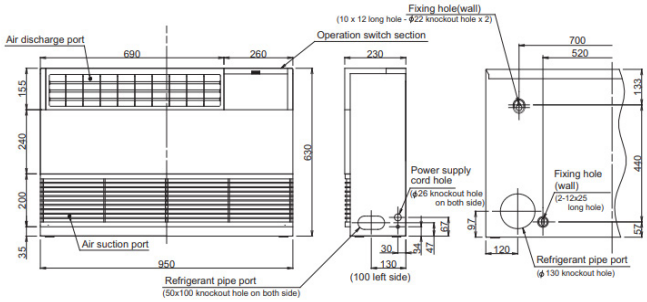

VRF FLOOR MOUNTED CONSOLE: MML - UP0241H-E

- One single cabinet size, for all capacity models.
- Minimum space required for installation and servicing.
- Refrigerant and drain piping with four installation possibilities.
- Has the ability to have Air flow in horizontal and vertical direction.
- Perfect choice, for refurbishment projects, where the available space is limited.

Hi - Res Image

Performance Data			
Capacity Code		HP	2.5
Nominal	Cooling Capacity	kW	7.1
	Heating Capacity	kW	8.0
UK	Cooling Total/Sensible	kW	6.4/4.2
	Heating	kW	5.4
Electrical	Power Input	kW	0.102
	Run Current	Amps	0.47
	Start Current	Amps	1.10

Indoor Data			
Airflow	High - Medium - Low	l/s	300 - 267 - 217
	High - Medium - Low	m3/h	1080 - 930 - 780
Sound	Pressure High - Medium - Low	dB(A)	49 - 44 - 39
	Power High - Medium - Low	dB(A)	64 - 59 - 54
Unit	Height x Width x Depth	mm	630 × 950 × 230
	Weight	kg	40
Pipe Connection	Flare Connections (gas - liquid)	inch	5/8 - 3/8
	Drain Pipe Connection OD/ID	mm	26/20
Power Supply	Suggested Fuse Size	V/ph/Hz-A	220-240/1/50-5

Accessories	
RBC-ASCU32Y-E	Compact Controller - Local Compact Controller , LCD Display
RBC-AMTU31-E	Standard Controller - Standard remote controller can control an individual indoor unit or a group of 8 indoor units.
RBC-AMSU52-E	Standard Controller - Includes timer and back light display as well as power-save functions, multilingual
RBC-AWSU52-E	Premium Remote Controller - Includes timer and back light display as well as power-save functions, multilingual (inc. Bluetooth)

Compatible R410a outdoor condensers:
Mini SMMS-e, SMMS-u

Compatible R32 outdoor condensers:
Mini SMMS

Related items:
- Full specification
- BIM files
- CAD files
- Airflow/ fan curve
- Dimensional drawing
- Wiring diagram
- Noise curve data
- Installation manual

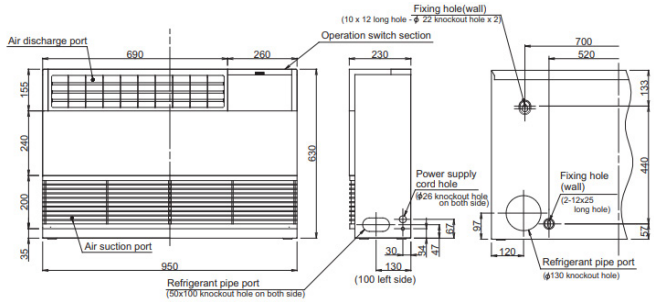

DOWNLOAD BROCHURES

TOSHIBA

OFFICE LOCATIONS

Manchester
Carrier Solutions UK Ltd
Unit 15 S:Park Business Park
Hamilton Road
Stockport
Greater Manchester
SK1 2AE
Tel: 0330 236 8630 - **opt 2**
marketing.uk@toshiba-ac.com

St Albans
Carrier Solutions UK Ltd
Unit 7, Riverside Industrial Estate
Borderlake House
London Colney
St Albans
AL 2 1HG
Tel: 0330 236 8630 - **opt 4**
marketing.uk@toshiba-ac.com

Telford
Viessmann UK
Hortonwood 30
Hortonwood Roundabout
Telford
Shropshire
TF1 7YP
Tel: 0330 236 8630 - **opt 5**
marketing.uk@toshiba-ac.com

Plymouth
Carrier Solutions UK Ltd
Porsham Close
Belliver Industrial Estate
Plymouth
Devon
PL6 7DB
Tel: 0330 236 8630 - **opt 2**
marketing.uk@toshiba-ac.com

DEPARTMENTAL CONTACT DETAILS

Sales Order Processing
0330 236 8630 opt 2 - **opt 1**
sales.support@toshiba-ac.com

Pre Sales Team
0330 236 8630 opt 2 - **opt 2**
projects.uk@toshiba-ac.com

Spare Parts
0330 236 8630 opt 2 - **opt 3**
spares@toshiba-ac.com

Warranty
0330 236 8630 opt 2 - **opt 4**
warranty@toshiba-ac.com

Technical Support
0330 236 8630 opt 2 - **opt 5**
technical.enquiries@toshiba-ac.com

Training
0330 236 8630 opt 2 - **opt 6**
toshiba.training@toshiba-ac.com

www.toshiba-aircon.co.uk

A Carrier Company

© 2026 Carrier. All Rights Reserved.