

### **New Mini Touch Screen Controller RBC-MTSC1**

**TOSHIBA** are pleased to announce the launch of the NEW Mini Touch Screen Controller RBC-MTSC1 to join the controls system line-up.



#### 1. Line Up


	NEW Model Name	Previous Model Name
Mini Touch Screen Remote Controller	RBC-MTSC1	


#### 2. Production date

Q2 2019

#### 3. Features

- 2 wire format used for our standard controllers
- Large capacitive display
- Configurable display icons; mode, fan; Up & Down, On/Off
- Up to 30 different wallpaper pictures for corporate display, messaging or advertising
- Use wallpapers for screensavers, timeouts or wake ups
- Integrated USB for fast upload of images
- RGB colour sliders to transform and match corporate environments
- Compact sleek design (HxWxD) 47 x 141 x 15 mm
- Available in Black (cost optional colours Graphite, White, Beige)
- Set DN codes
- Set central addresses
- Leak detection warning symbols to complement the current Toshiba solution
- Text inputs for instructions example "Error" "contact reception tel: 1234"
- Use CN61 connection to set back for energy saving for un-occupied spaces





## **TOSHIBA** Leading Innovation >>>

#### 4. Preliminary Specification

Wired Remote Controller Accessory		RBC-MTSC1	
Type		Compact simple wired touch screen controller	
Appearance (Black)		Compact simple wired tooch screen controller	
Cost colour options		Graphite, White, Beige	
Dimension	HxWxD	74 x 141 x 15 mm	
Installation place		Wall	
Cable connection		2 core Use wire of 0.5 mm <sup>2</sup> to 2.0 mm <sup>2</sup>	
Power		12V DC	
Max wired length		500 m	
Configurable Icons		✓	
Maximum screen saver/wallpo	aper options	30	
Text inputs for instructions		<b>√</b>	
RGB colour sliders		✓	
USB connection		✓	
ON/OFF		✓	
	Auto	✓	
	Cool	✓	
Mode [Note.1]	Heat	✓	
mode [Note:1]	Dry	✓	
	Fan	✓	
	Auto	18 - 29 °C	
Temperature setting range	Cool	18 - 29 °C	
	Heat	18 - 29 °C	
	Dry	18 - 29 °C	
FAN auto/low/med/high			
Louver position		✓	
Ventilation control		✓	
Filter sign/reset			
Return back			
Power Save	111111		
Individual louver			
Frost protection (heating at 8 °C)			
Self-cleaning mode			
Energy Monitoring			
CLOCK		<u>-</u> // // // // // // // // // // // // //	
ECO/HI-POWER/MEMO/AUTO			
Grille up/down			
Function setting (DN code)		✓	
Temperature sensor		✓	
Header/follower	Header	-	
Multiple control	Follower	- Max 1 indoor	
Multiple control		MAX I INDOOL	
Timer Weekly schedule			
Connectivity to Schedule Timer (TCB-EXS21TLE)			
Error output		<u>-</u>	
Error history			
		<u>-</u> ✓	
Pofrigorant look dataction			
Refrigerant leak detection wa			
Refrigerant leak detection wa Air to Air Heat Exchanger with	ON/OFF Mode		


[NOTE.1] Configurable for multiple screen background setting. Use CN61 connection to set back for energy saving for un-occupied space.





# TOSHIBA Leading Innovation >>>

5. <u>Dimensions</u>

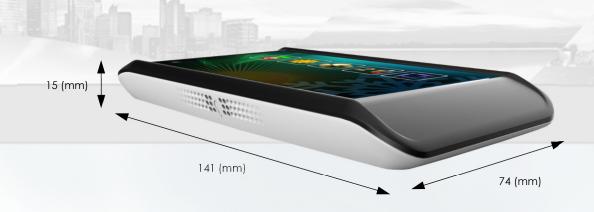

For further information please contact our customer support team on 0870 843 0333, your local representative, your supplier of **TOSHIBA** products or email any enquiries to: - general.enquiries@toshiba-ac.com



